ATP EDUCATION GUIDE

Find setups: how the screener works and how to use it

A step-by-step manual for a new user, from signing in to reading the results.

5
steps: list, chart, scan, run, read

169
building blocks in the function catalogue, in 18 groups

9
chart timeframes, from 1 minute to Monthly

500
stocks in the largest list a scan can take today

Read this first

The screener shows which stocks meet **conditions you choose**, on the data shown. A match is not a recommendation, not a signal to trade and not advice. Every decision stays yours.

What you see depends on the switches your administrator has turned on. This guide says so wherever a part may be missing. Charts in this guide are drawn from made-up data and carry no names or prices.

Contents

1. What the screener is 3

2. Before you start: sign in and open Find setups 4

3. A tour of the page 5

4. Step 1 - Pick your list 6

5. Step 2 - Pick the chart (timeframe) 8

6. Step 3 - Start a scan: ready scans, templates, the library 9

7. Step 4 - Build and edit conditions 11

8. Step 5 - Run the scan and read the results 13

9. Where the data comes from 15

10. Every function you can use 16

11. Three example scans, step by step 32

12. Messages, problems and what to do 34

13. Glossary 36

14. For the administrator 37

How to read this guide

Words in "blue quotes" are exactly what you see on the screen (a button, a tab or a message).


Numbered circles are steps. Do them in order.

A green **Check** box ends each main step. If your screen does not match it, see section 12.

Function tables mark where each block lives in the builder: Indicator Filter Category Rank Formula , and Extra switch when it shows only after your administrator turns on an extra part.

1. What the screener is

The screener (the page **Find setups**) checks a list of stocks against conditions you pick, on closed candles, and shows which stocks meet all of them right now. You choose the list, the chart timeframe and the conditions. ATP reads the candles, works out each condition for each stock, and gives you the count and the list of matches. You can then open a match on a chart, in the same place, to see why it matched.



The whole flow. Each box is one section of this guide (sections 4 to 8).

What happens when you press Run

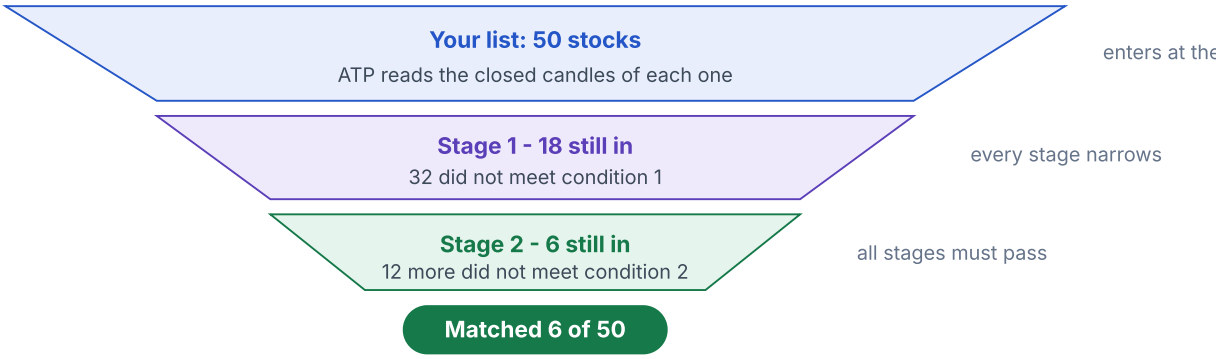


Illustration with made-up counts. The page draws this as a funnel: the count left after each stage shows on its right edge.

What the screener does NOT do

- It shows **conditions** that are true on the data shown. It is **not** a signal to trade and **not** advice.
- It does not rank stocks as good or bad, and it makes no claim about what price does next.
- It never places, changes or cancels an order. An alert from a scan only tells you.
- It uses only the conditions you see. It adds no hidden rule. You can open every condition and see its settings.
- It decides on **closed** candles. A candle still forming is not used by a scan.
- The page says this in its own words under "**About these results**": *"Matches are symbols that passed the screen's filters on the data shown; they are not recommendations."*

2. Before you start: sign in and open Find setups

You need an ATP account. A connected broker is not required for Daily, Weekly and Monthly scans; it is required for intraday scans (see section 9).

2.1 Sign in

1. Open the ATP website in your browser (phone or computer).
   You see: the "**Sign in**" screen with the AiAlgoDesk name. Where offered, sign-in buttons such as "**Continue with Google**" sit at the top, then "**or use email**".

2. Either tap a sign-in button at the top, or type your "**Email**" and "**Password**".
   You see: If two-factor sign-in is on for your account, a box "**Authenticator code**" (format `123 456`).

3. Press "**Sign in**".
   You see: the app opens on "**Today**".

4. No account yet? Tap "**Create an account**" under "**New here?**". If your team uses invites, the screen says "**New here? Ask your team owner for an invite link.**"


5. Forgot the password? Tap "**Forgot password?**", then "**Send reset link**".

2.2 Open Find setups

6. **On a computer:** look at the menu on the left. Under the heading "**Find**", click "**Find setups**".
   You see: the page title "**Find setups**" with the line "**Scan your list for the setups you pick.**"

7. **On a phone:** tap "**Find setups**" in the bar at the bottom. If it is not there, tap "**More**" and type `screener` or `scan` in the search box; it finds Find setups.

8. If you see "**Coming soon**", or Find setups is not in the menu at all, the screener is not switched on for your organisation yet. Ask your administrator (section 14).



Computer: left menu




Phone: bottom bar (the exact tabs depend on what is switched on)

Simplified drawing of the menus. Some entries (for example Terminal) show only when switched on.

Check: you should now see the Find setups page, with two small cards at the top ("**Your list**" and "**Chart**") and a block "**Start a scan**".

3. A tour of the page

The page has five parts, from top to bottom. Nothing shows in Results before your first run.

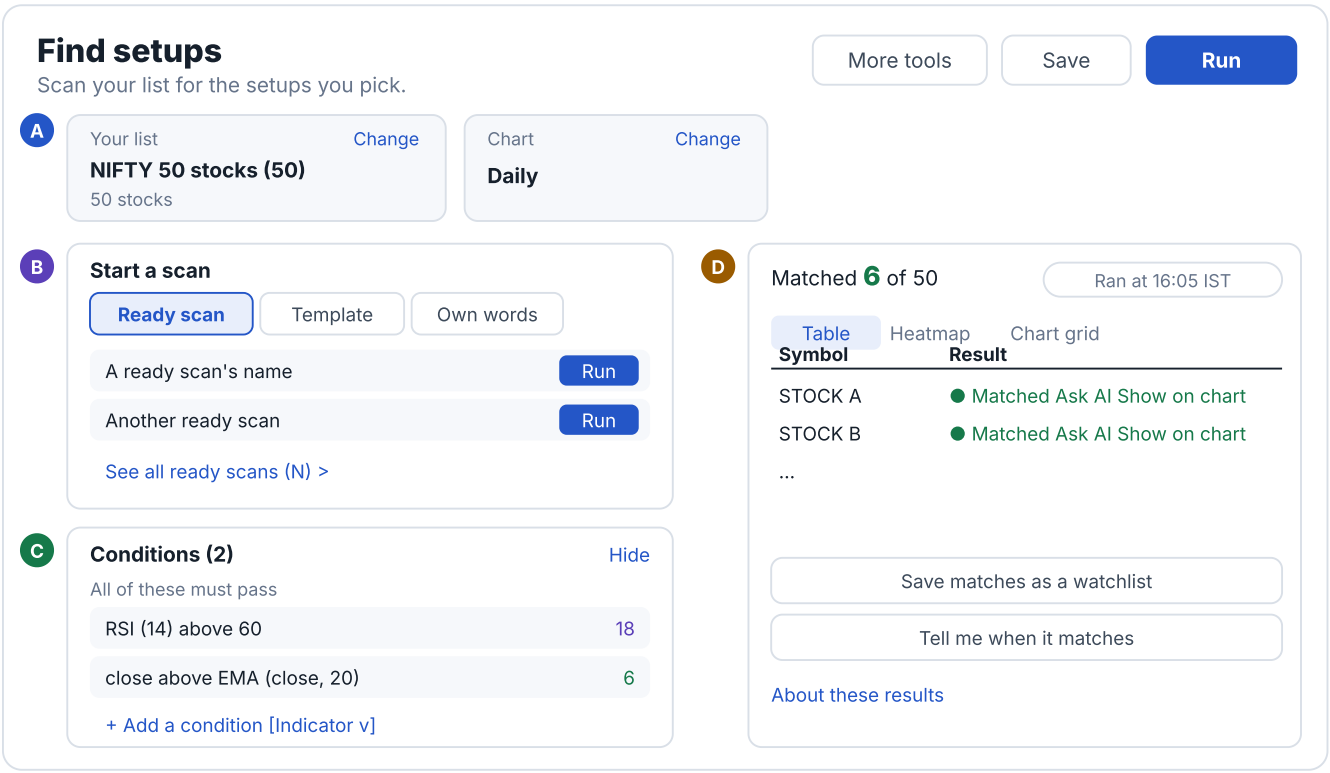

Simplified drawing (computer layout). STOCK A / STOCK B stand for any symbol. On a phone the parts stack, and Save / Run sit in a bar just above the bottom menu.

Part	Name on screen	What it is for
A	"**Your list**", "**Chart**"	Which stocks are scanned, and on which candle timeframe. Each card has "**Change**". Header buttons: "**More tools**", "**Save**", "**Run**".
B	"**Start a scan**"	Three tabs: "**Ready scan**" (one tap runs it), "**Template**" (fills the conditions for you to edit), "**Own words**" (type an idea in plain words; shown only when switched on).
C	"**Conditions (N)**"	The conditions of the current scan, as a funnel. N is how many there are. Closed until you open it or a scan fills it.
D	Results	Before a run: "**Results show here after you run a scan.**" After a run: "**Matched N of M**", the time it ran, the table, and the next steps.
More	"**More tools**"	A side panel (bottom sheet on a phone) with the less used tools: "**Browse all screens**", "**Past runs**", "**Rankings**", "**Look back**", "**ETFs**", "**Versions**", and "**Advanced**". Each one appears only when it is switched on.

If your app shows an older layout, with a column titled "**Universe**" on the left and "**Start with a ready scan**" lower down, the same steps apply; only the places of the parts differ. This guide follows the redesigned layout.

Check: you should now be able to point to the five parts: the two cards, Start a scan, Conditions, Results, and the More tools button.

4. Step 1 - Pick your list

The list (also called the universe) is the set of stocks the scan reads. The page opens on **NIFTY 50 stocks**.

9. On the "**Your list**" card, press "**Change**".
   You see: a panel "**Your list and chart**" opens under the cards, with a box "**Scan these stocks**".

10. Open "**Scan these stocks**". You can type in it to search.
    You see: groups of lists: "**Index stocks**", "**Sectors**", "**F&O**", "**My watchlists**", and "**Other**" with "**Type my own symbols**". Each list shows its size in brackets.

11. Pick a list. To type your own, pick "**Type my own symbols**" and type the symbols in the box "**Your symbols (up to 500)**", separated by commas or new lines.
    You see: under the box: "**N stocks · list name**". If something is wrong, an amber note (see the table of notes below).

12. Press "**Done**".
    You see: the "**Your list**" card shows the new name and the number of stocks.

Which lists exist

Group	What is in it	Notes
Index stocks	The member stocks of an index, for example NIFTY 50, NIFTY NEXT 50, NIFTY 100, 200, 500, MIDCAP 150, SMALLCAP 250, sector indices (BANK, IT, AUTO, PHARMA, METAL ...) and theme indices. ATP's catalogue holds 37 indices.	A list shows only when ATP has stored its members. NIFTY 50 is always first.
Sectors	24 sector lists: Banking, Pharma, Financial Services, IT, Automobile, Healthcare, FMCG, Oil & Gas, Metals & Mining, Capital Goods, Power, Telecom, Chemicals, Construction, Construction Materials, Consumer Durables, Consumer Services, Realty, Media, Services, Textiles, Utilities, Forest Materials, Diversified.	Built from ATP's shared reference data.
F&O	One list: "**F&O stocks (N)**", the stocks in the futures and options segment.	
My watchlists	Your own watchlists.	Shown when watchlists are switched on.
Other	"**Type my own symbols**".	NSE symbols.

The list of the indices themselves (index instruments) is not offered here: a scan runs on stocks.

How big a run can be - today

Limit	Number	What it means for you
Largest list	**500**	A longer list (for example NIFTY TOTAL MARKET) is cut to its first 500 stocks.
Stocks in one request to the server	**50**	A larger list is sent in parts, one after another. The page shows "**Scanning X of Y stocks...**" with a progress bar and a "**Stop**" button.
Part size	**5 to 50**	Set from your broker's request limits (10 when ATP cannot tell). The page waits between parts to stay inside your broker's limits.
Live counts while editing	**50**	For a larger list the page says "**Live counts show for lists of up to 50 stocks. Run scans all N, K at a time, within your broker's limits.**"
Stocks one alert watches	**50**	An alert on a larger list watches the first 50, unless you tick "**Run on the whole list**" (section 8).

Work in progress (not live yet when this guide was written)

A change is being built that removes the fixed 50 per request. Daily, Weekly and Monthly scans will read ATP's own store for the whole list at once; only stocks missing from the store go to your own broker, paced. Results will come in as they are ready (for example *"120 / 500 done"*), you can cancel, and if the broker slows ATP down the page will say *"Slowed by broker limit"* instead of failing. Until it is released, the limits in the table above apply.

Notes you may see under the list

Message	What it means and what to do
This list has no stocks yet, so the scan runs on NIFTY 50.	The list you picked is empty (for example a new watchlist). Add stocks to it, or pick another list.
Type at least one symbol. Until then the scan runs on NIFTY 50.	You chose "**Type my own symbols**" but the box is empty.
This list could not be loaded, so the scan runs on NIFTY 50.	A connection problem. Try again in a moment.
The latest NIFTY 50 list could not be loaded, so the built-in list (as of 23 Oct 2026) is used.	ATP uses a list it carries itself. The scan still runs.

Check: you should now see your chosen list's name and its number of stocks on the "**Your list**" card.

5. Step 2 - Pick the chart (timeframe)

The timeframe is the size of one candle. A Daily scan reads daily candles; a 15 min scan reads 15-minute candles.

13. On the "**Chart**" card, press "**Change**" (the same panel as the list opens).
14. Under "**Chart**", open the box and pick one of: "**1 min**", "**3 min**", "**5 min**", "**15 min**", "**30 min**", "**1 hour**", "**Daily**", "**Weekly**", "**Monthly**".
15. Press "**Done**".
    You see: the "**Chart**" card shows the timeframe in words, for example "**Daily**".

Daily, Weekly, Monthly

- Work with or without a broker (section 9).
- Weekly and Monthly candles are built from daily candles.
- A good place to start as a beginner: fewer candles, less noise.

1 min to 1 hour (intraday)

- Need your own connected broker.
- Some functions work only on some intraday timeframes (the tables in section 10 say which).
- Session functions (opening range, previous day high) make most sense here.

Closed candle and forming candle



Made-up candles. A scan reads up to the last closed candle. The forming candle can still change, so a scan does not use it.

- **Scans use closed candles only.** The page says it under the list panel: "**Closed bars only, read from your broker.**"
- "The last bar" in this guide always means the last **closed** candle.
- The only place a forming candle can be used is an **alert**, if you pick "**While the bar is forming**" (shown when that option is switched on; not offered for Weekly or Monthly). The app marks it *"earlier, but it can change before the close"*. The default is "**When the bar closes**", marked *"recommended: the bar is final"*.
- Inside a condition you can also read a candle further back with **bars ago**, and read one side on another timeframe (section 7).

Check: you should now see your timeframe in words (for example "**Daily**") on the "**Chart**" card.

6. Step 3 - Start a scan: ready scans, templates, the library

There are four ways to start. All of them end in the same place: conditions you can see and change.

Way	Where	What happens
Ready scan	Tab "Ready scan"; more under "See all ready scans (N)"	One tap on "Run" fills the conditions and runs it on your list. The page says: *"One tap runs it on (your list). You can change every condition afterwards."*
Template	Tab "Template"	Fills the conditions; nothing runs until you press "Run". If conditions are already there, ATP asks *Replace the current conditions with "name"?*
Blank	Tab "Template", last row "Blank: I add conditions"	Opens empty Conditions; you add blocks one by one (section 7).
Own words	Tab "Own words" (only when switched on, and it needs an AI provider set up)	Type an idea in plain words. *"Each part becomes a condition you can check. Anything ATP cannot read is listed, never guessed."* Then "Make the scan" and "Open as blocks".

6.1 The three templates (always there)

Name	The conditions it fills	Timeframe it was made for
Momentum	`RSI (14) above 60` and `close above EMA (close, 20)`	Daily (works on any)
Oversold	`RSI (14) at or below 30`	Daily (works on any)
Trend on the daily	`close on Daily above EMA (close, 50) on Daily`	Daily, even when the scan's chart is different

The names are only labels. "Momentum" and "Oversold" describe the condition, not a view on the stock.

6.2 The screen library

16. Press "See all ready scans (N)", or "More tools" then "Browse all screens".
    You see: the "Screen library", with a search box "Search names and definitions" and two filters "All methods" and "All setups".

17. Filter by **method** (Price action, Indicator, Volume and order flow, Fundamental and ownership, Legends, My screens) and by **setup** (Breakout / breakdown, Pullback / continuation, Reversal, Range / mean reversion, Momentum / relative strength, Options and volatility, Events and flow, Market internals).

18. On a card, press "Open" (fills the conditions) or "Try as a scan". A card that says "This screen opens in the builder soon" cannot be opened yet.

The library holds **48 screens** in its file. Which ones you see depends on what is switched on:

Family	Count	Examples (names as in the library)	Shows when
Starters	3	Momentum, Oversold, Trend on the daily	always

Family	Count	Examples (names as in the library)	Shows when
Breakouts, set 1	12	Swing 1H range breakout · Daily swing-high / low break (BOS / CHoCH) · Intraday 15m NR7 breakout · Daily / Weekly 52-week high breakout · Intraday 15m ATR expansion · Intraday 5m volume breakout · two opening-range breakouts · first-hour and previous-day high / low breaks · new high / low of day	"Breakout screens, set 1" is on
Breakouts, set 2	8	Daily VCP-style breakout and watchlist · Daily 20-day and 55-day Donchian breakouts · Daily Bollinger squeeze · Intraday 15m TTM squeeze fire · Daily 50-day moving-average breakout · Daily RSI / ADX regime breakout	"Breakout screens, set 2" is on
Breakouts, set 3	8	Daily trendline breakout · Swing 1H channel breakout · Daily flag and triangle breakouts · two gap screens · Daily and 1H range-breakout retests	"Breakout screens, set 3" is on
Legends	17	Screens named after published methods of well-known traders and investors, for example "Darvas-style box breakout", "Turtle-style 20-day channel breakout", "Connors-style 2-period RSI pullback", "Graham-style defensive value (Graham number)"	"Legends cards" is on; value / growth cards also need reported company figures

A Legends card shows "**About the method**", "**The screen**", a table "**Editable parameters (default and documented range)**" and "**Public sources**". The "-style" in a name means the screen follows a published description; it is not endorsed by that person.

6.3 Other tools under More tools

Tool	What it does
"**Past runs**"	*"Your own runs, newest first. Opening one shows its results as they were then; nothing runs again."* You can also save a past run's matches as a watchlist.
"**Rankings**"	Pick a "**Ranking system**"; the panel shows your list's symbols ranked 0 to 100 with their factors.
"**Look back**" (or "**Look back and backtest**")	Who met the scan on a past date, and what the candles did afterwards. It describes the past only.
"**ETFs**"	A ready screen for exchange-traded funds.
"**Versions (N)**"	Earlier saved versions of this scan; "**Open this version**" puts its conditions back.
"**Advanced**"	Opens extra tools for experienced users: "**Run several screens together**", "**Pine Script**" (paste a TradingView script; ATP shows what it can translate), the Formula block and "**Live counts while editing**".

> **"Today's setups from your scans"** - when switched on, a short card at the very top of the page lists what your saved scans found, so the page opens on something ready.

Check: you should now see "**Conditions (N)**" with N above zero, and the scan's name in the name box (for example "**Momentum**"). If you started blank, N is 0 and the box says "**Untitled scan**".

7. Step 4 - Build and edit conditions

Every condition is a **block**. Blocks sit under the line "**All of these must pass**": a stock matches only when every switched-on block is true for it.

7.1 The six kinds of block

Block	Reads as	Use it for
Indicator	`RSI (14) above 60` `close crosses above EMA (close, 20)`	A number compared with "**A number**" or with "**Another indicator**". Comparisons: "**above**", "**at or above**", "**below**", "**at or below**", "**crosses above**", "**crosses below**".
Filter	`Pattern (hammer)` `NearSupport (0.5)`	A yes / no check, such as a candle pattern or a breakout.
Category	`Trend is UPTREND` `StructureEvent is not CHOCH_BEARISH`	A label compared with one or more of its values. Choose "**is**" or "**is not**"; tick at least one value.
Rank	`Rank of PctChange (close, 5) at or below 10`	Keeps the top of your list by a number. "**Rank of**": 1 = highest in the list. "**Percentile rank of**": 0 to 100.
Group	"**Any of these**" / "**Not all of these**"	"Either / or". A group passes when any one of its blocks passes (or, with Not all of these, unless every one passes).
Formula	`high - low < Min(high - low, 6)[1]`	Type a condition as text. Only under "**Advanced**", when switched on. It reaches functions the other blocks cannot.

7.2 Add your first block

19. Open "**Conditions**" with "**Show**" (if it is closed).
20. Next to "**Add a condition**", pick the kind of block: "**Indicator**", "**Filter**", "**Category**", "**Rank**" or "**Group**" (and "**Formula**" under Advanced).
21. Press "**Add a condition**".
    You see: a new row, for example `RSI (14) above 60` for an Indicator block. Every underlined part can be changed.
22. Tap the first word (the function) to pick another one from the list. Tap a number in brackets to change a setting; type it and press Enter (Escape cancels).
23. Tap the comparison word ("**above**") to change it, then the right side to change the number.
24. To compare with another indicator instead of a number, open the row's **advanced options** (the small arrow at the row's end) and choose "**Compare with**": "**Another indicator**".

7.3 Bars ago and another timeframe

- **Timeframe chip.** Each side has a small chip. Left alone it says "**Scan**" and uses the scan's chart. Pick another timeframe (for example "**Daily**") to read that side on it. Example: the scan runs on 15 min, but `close on Daily above EMA (close, 50) on Daily`.
- **Bars ago.** In the row's advanced options, "**Left side, bars ago**" and "**Right side, bars ago**": a whole number from 1 to 500; blank is the last closed candle. Example: `close above close 1 bar ago`.

- Some functions are read on the **last bar only** (structure, patterns, zones, the option chain, ranks). They take no bars-ago and no other timeframe.

7.4 Manage blocks

Action	How
Switch a block off for a moment	The tick box at the start of the row (*Disable this block* / *Enable this block*). A switched-off block is kept but not checked.
Copy a block	The copy icon (*Duplicate*).
Remove a block	The bin icon (*Remove*).
Change the order	Drag the row, or press Alt and an arrow key on it.
See it in plain words	The row's advanced options show "**Reads:**" and the sentence. "**Advanced: the code**" shows the same block as text.
Name the scan	Type in the name box at the top of Conditions (shows "**Untitled scan**" until you do).
Keep the scan	Press "**Save**". A saved scan can later have an alert and versions.
Start over	"**Blank: I add conditions**". ATP asks *"Clear the current conditions and start from zero?"*

7.5 When Run is greyed out

The reason shows beside "**Run**" (on a phone, in the bottom bar):

Reason on screen	What to do
Pick a scan first	Pick a ready scan or template, or add a condition.
Add a condition	There is no switched-on block. Add one.
Add symbols	Your list is empty. Go back to step 1.
Fix stage N	Block N has a problem; its red line says what, for example *"Pick at least one value for Trend."*
Fix the conditions	The scan as a whole was refused; the message under Conditions says why (section 12).

Check: you should now see your blocks under "**All of these must pass**", no red line under any block, and "**Run**" no longer greyed out.

8. Step 5 - Run the scan and read the results

25 Press "**Run**" (header on a computer, bottom bar on a phone).
You see: for a larger list, "**Scanning X of Y stocks...**" with a bar and "**Stop**". Then the results header.

26 Read the header: "**Matched N of M**". N is green when above 0 and amber when 0. If some stocks could not be read it adds "**· K could not be read**", with one line giving the reason and one button ("**Log in**", "**Connect broker**", "**Retry**" or "**Try another timeframe**").

27 Read the time pill: "**Ran at HH:MM IST**". When it turns amber it adds *"x min ago, run again for newer bars"*. Hover (computer) to see where the data came from, for example *"Data from your broker"* or *"Data from ATP's stored end-of-day history"*. Where the data badge is switched on, a badge such as "**EOD · date**" shows the session the data is from.

28 Look at the table. By default only matches are listed; a line says how many did not match, with "**Show the N that did not match**" (or "**Show all N**"), and "**Matches only**" to go back.

29 Press "**Show on chart**" on a matched row to open its chart **in place** (a window over the page; you do not leave Find setups).

8.1 The results table

Column / control	What it shows
Symbol	The stock. Sort by tapping the header.
Result	● **Matched**, Did not match, or **Could not be read · reason**. A stock that could not be read is never counted as "did not match".
Stages	One chip per condition: filled when the stock passed it (wide screens; tick "**Stages column**").
"**Ask AI**"	Opens the AI Copilot beside the page about this symbol (when the Copilot is on). It explains; it does not trade.
"**Show on chart**"	The evidence chart (below). Shown when match charts are switched on and stored for that row.
"**Auto-refresh 1m**"	While ticked and the page is open, the same scan runs again every minute.
"**Export (CSV)**"	Downloads the table as a spreadsheet file.
"**Table**" / "**Heatmap**" / "**Chart grid**"	Other views of the same answer (when switched on). Heatmap: boxes by sector, sized by market cap, coloured by the last day's change, matched ones ringed. Chart grid: a small chart per match.

> **This condition removes every symbol.** If one stage leaves nothing, a note says *"This condition removes every symbol. Loosen it or disable it to see candidates."* with "**Show the stage**" and "**Disable it**". In the funnel, the count beside each stage shows how many are still in, and *See what this removes* lists the stocks it took out.

8.2 The evidence chart (Show on chart)

Part	What it shows
Title	"**Why STOCK matched**" - *"Only the screen's own conditions are drawn."*
The chart	The candles up to the matched bar, with each condition drawn (you can hide one by its chip).
"**Why it matched**"	Each condition in words.
Verify table	Columns "**Result**", "**Condition**", "**Values at the matched bar**". "**Show failed conditions**" adds the ones that were not true (for example the other side of an "any of these" group, marked "not needed").
"**Trend (Dow):**" strip, "**Replay:**"	When the extra chart context is switched on: the trend on other timeframes, and step back / forward one bar to see how the match formed.
"**Send to my Telegram**"	Sends this chart as an image to your own linked Telegram chat.
"**About these numbers**", "**Advanced: the code**"	An explanation, and the conditions as text.

8.3 After a run: keep or watch the matches

30 "**Save matches as a watchlist**": type a name, press "**Save**". The list appears at once under "**My watchlists**".

31 "**Tell me when it matches**" (when switched on): a window says *"ATP checks each time a daily bar closes for "My scan" on NIFTY 50 stocks (50 stocks), and tells you when one matches."*


32 Pick "**When to check**": "**When the bar closes**" or (where offered) "**While the bar is forming**". For a long list, tick "**Run on the whole list**" if you want the alert to read the whole list.

33 Connect Telegram in the same window if you want messages there, then press "**Turn on the alert**".
You see: *"Alert on. ATP tells you when a symbol matches this scan."* Under "**Alerts on this scan**", each alert with "**Pause**" / "**Turn back on**". The foot says: *"An alert only tells you; it never places or changes an order."*

A "Then" step on alerts. When your administrator has switched it on, an alert rule in **Settings › Alerts** can have a "**Then**" step that keeps watching a matched symbol on 5 or 15 minute candles and then sends a notification, or a **PAPER** (practice) proposal you approve or reject. The app says: *"Setups are information for your own decision. They are not recommendations, and nothing is placed without your approval."* It is not part of a normal scan.

Check: you should now see "**Matched N of M**", the "**Ran at**" pill, the table, and (for a match) the chart window after "**Show on chart**".

9. Where the data comes from

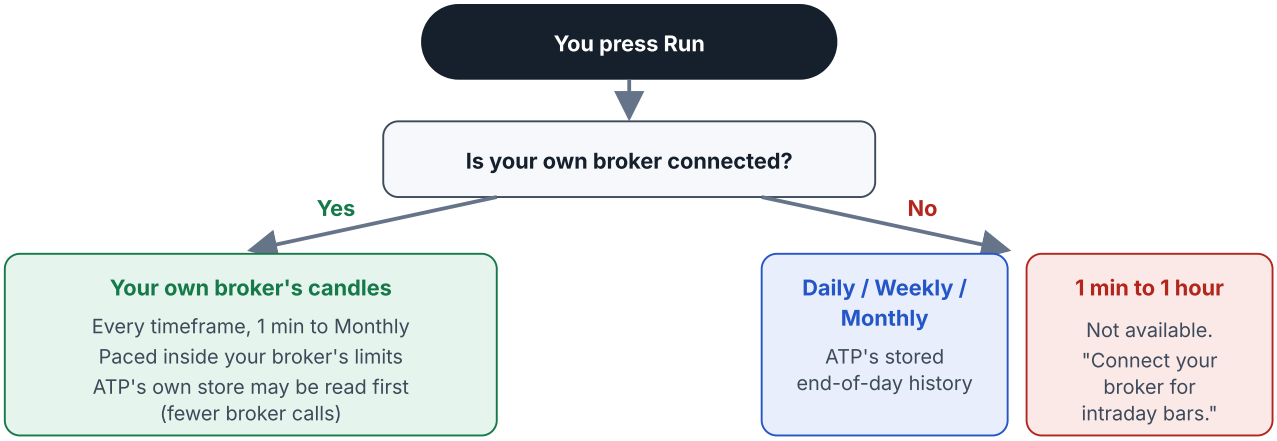

Which candles a scan reads. The exchange here is NSE.

With your own broker connected

- The candles come from **your own** broker connection. The time pill's hover says *"Data from your broker"*.
- ATP asks the broker in paced parts, so it stays inside the broker's request limits. A stock that waited for that limit is listed: *"N stocks waited for your broker's limit. Run again in a minute to include them."*
- Your broker login ends from time to time. Then the stocks say *"Your broker login has ended. Log in again to read the bars."* and the button "**Log in**" opens the broker panel in place.

Without a broker: end-of-day data

- Daily, Weekly and Monthly scans read **ATP's stored end-of-day history** (the exchange's daily files). The hover says *"Data from ATP's stored end-of-day history"*. Where the data badge is on, it reads "**EOD · date**". On other pages (charts, watchlists) the same data carries the label **"Last close <date>"**.
- The stored window ends at the last stored session, so the newest candle in the scan is the last closed day. Today's session is never read from this store.
- A stock that is not in the store says *"Daily history for SYMBOL is not stored yet."*
- Intraday scans (1 min to 1 hour) need your own broker: *"Connect your broker for intraday bars."*

> **Why there is no shared live data**
>
> ATP does not pass live or intraday market data from one person's broker connection to anyone else, not even from the owner or an administrator. This follows the market regulator's circular of May 2024, broker terms and the exchange's data licence. Live data for you comes only from your own connected broker. End-of-day data from the exchange's daily files is shared with everyone.

Store-first scans

When the administrator has switched it on, scans read **ATP's own stored candles first**:

- Daily, Weekly, Monthly: from the stored exchange daily files only - no broker call at all.
- Intraday: your own stored one-minute candles, built into the scan's timeframe, plus only the newest candles from **your own** broker, paced. An index (its volume comes from its future) and a stock the store does not hold go through your broker as before.
- The candles are the same closed candles either way, so the same data gives the same matches.

Check: after a run, hover (or long-press) the "**Ran at**" pill: you should now see where the data came from.

10. Every function you can use

This is the full catalogue ATP's screener knows: **167 building blocks in 18 groups**. The name in the first column is the name the builder shows in its list. Settings in brackets are shown in the order the builder shows them; a value after "=" is the setting a new block starts with.

#	Group	Count	Notes
A	Price and volume of a candle	6	always
B	Moving averages	6	always
C	Momentum oscillators	10	always
D	Trend direction and strength	13	always
E	Volatility and bands	10	1 needs "Extra screen functions"; 1 needs breakouts
F	Volume measures	3	2 need breakouts
G	Maths and history helpers	16	some only as Formula or as a comparison word
H	Ranks across your list	3	Rank block; one needs "Rank a universe"
I	Session and intraday levels	9	2 need extra switches
J	Market structure, swings and levels	15	1 needs "Extra screen functions"
K	Candle patterns	3	18 pattern names
L	RSI divergence	2	needs "Extra screen functions"
M	Option chain and futures	4	needs stored option-chain data
N	Breakouts (yes / no and labels)	22	need "Breakout screens"
O	Breakout levels (prices of a breakout)	11	need "Breakout screens"
P	Market zones	4	need "zones"; Formula only
Q	Wave count	16	need "Wave count" (marked unfinished)
R	Company data: classification, figures, ownership, events	14	Formula only, extra switches and data

Three rules that apply to every function

- **Units must match.** ATP refuses to compare a price with an oscillator, for example `close above RSI (14)` ("compares price with index"). A plain number takes the unit of the other side.
- **Windows are whole numbers from 1 to 500** candles. A function needs enough candles before the last one; with too few, the stock says *"The screen has no value on the last bar (too little history for its indicators)."*
- **A setting with a fixed set of choices** (for example `side` = up / down) must be one of those choices.

A. Price and volume of a candle

6 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`open, high, low, close`	The candle's open, highest, lowest and closing price. Indicator	None. Use bars ago or another timeframe on the chip.	`close above high 1 bar ago`	Forgetting it is the last **closed** candle, not the live price.

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`volume`	Shares traded in the candle. Indicator	None.	`volume above SMA (volume, 20)`	Comparing volume with a price (refused: different units).
`oi`	Open interest of a derivative. Indicator	None.	`oi above oi 1 bar ago`	Using it on a cash stock, which has no open interest.

B. Moving averages

6 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`SMA`	Simple average of a value over n candles. Indicator	**x** (close, open, high, low, volume); **n** candles (starts at 20).	`close above SMA (close, 50)`	Taking n so large the stock lacks history (no value on the last bar).
`EMA`	Exponential average: newer candles weigh more. Indicator	**x**, **n**.	`EMA (close, 20) crosses above EMA (close, 50)`	Expecting "crosses above" to be true for days; it is true only on the candle of the cross.
`WMA`	Weighted average: the newest candle weighs n, the oldest 1. Indicator	**x**, **n**.	`close above WMA (close, 20)`	Mixing WMA and EMA values in one rule and expecting equal results.
`HMA`	Hull average, a fast-reacting smooth average. Indicator	**x**, **n** (at least 2).	`HMA (close, 21) above HMA (close, 21) 1 bar ago`	n = 1 (refused).
`TMA`	Triangular average: an average of an average. Indicator	**x**, **n**.	`close above TMA (close, 20)`	Expecting it to turn quickly; it is the slowest of these.
`MA`	One block, choose the type. Indicator	**x**, **n**, **type** = EMA / SMA / WMA / HMA.	`close above MA (close, 50, SMA)`	Leaving type at EMA while reading a chart drawn with SMA.

C. Momentum oscillators

10 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`RSI`	Relative strength index of the close, 0 to 100. Indicator	**n** = 14.	`RSI (14) crosses above 30`	Comparing RSI with close (refused) - compare it with a number.

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`StochK, StochD`	Stochastic %K and its average %D, 0 to 100: where the close sits in the recent high-low range. Indicator	%K: **n** = 14, **smooth** = 3. %D adds **d** = 3.	`StochK (14, 3) crosses above StochD (14, 3, 3)`	Using different n on %K and %D in one comparison.
`StochRSI`	Stochastic of RSI, 0 to 100, unsmoothed. Indicator	**n** = 14.	`StochRSI (14) below 20`	It needs about twice n candles of history.
`CCI`	Commodity channel index of the typical price. Indicator	**n** = 20.	`CCI (20) above 100`	Thinking it stops at 100; it has no fixed range.
`MFI`	Money flow index, 0 to 100: RSI of the typical price weighted by volume. Indicator	**n** = 14.	`MFI (14) below 20`	Using it on something without volume.
`WilliamsR`	Williams %R, from -100 to 0. Indicator	**n** = 14.	`WilliamsR (14) above -20`	Typing 80 instead of -80 (the scale is negative).
`MACD, MACDSignal, MACDHist`	MACD line (fast EMA minus slow EMA), its signal line, and their difference. Indicator	**fast** = 12, **slow** = 26, **signal** = 9 (fast must be below slow).	`MACD (12, 26, 9) crosses above MACDSignal (12, 26, 9)`	Setting fast above slow (refused).

D. Trend direction and strength

13 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`ADX`	Strength of a trend, 0 to 100 (not its direction). Indicator	**n** = 14.	`ADX (14) above 25`	Reading a high ADX as "up"; it can be a strong fall too.
`PlusDI, MinusDI`	The upward and downward direction lines of the ADX system. Indicator	**n** = 14.	`PlusDI (14) above MinusDI (14)`	Using a different n than the ADX it is read with.
`AroonUp, AroonDown`	0 to 100: how recently the highest high (Up) or lowest low (Down) of n candles happened. Indicator	**n** = 25.	`AroonUp (25) above 70`	Reading it as a price.
`Supertrend`	The Supertrend line (a price). Indicator	**n** = 10, **k** = 3.0 (0.1 to 20).	`close above Supertrend (10, 3)`	Expecting the same line as a chart that uses other settings.
`SupertrendDir`	+1 while the line is below price, -1 while above. A change of sign is a flip. Indicator	**n** = 10, **k** = 3.0.	`SupertrendDir (10, 3) crosses above 0`	Comparing with a price instead of 0 or 1.
`PSAR`	Parabolic SAR, a trailing level below or above price. Indicator	**start** = 0.02, **step** = 0.02, **max** = 0.2 (start not above max).	`close above PSAR (0.02, 0.02, 0.2)`	Making start larger than max (refused).

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`PSARDir`	+1 while SAR is below price, -1 while above. Indicator	As PSAR.	`PSARDir (0.02, 0.02, 0.2) above 0`	As SupertrendDir.
`IchimokuTenkan`, `IchimokuKijun`	Ichimoku conversion and base lines: middle of the high-low of n candles. Indicator	Tenkan **n** = 9; Kijun **n** = 26.	`IchimokuTenkan (9) above IchimokuKijun (26)`	Swapping 9 and 26.
`IchimokuSpanA`, `IchimokuSpanB`	The two cloud edges, computed **shift** candles earlier. Indicator	A: **tenkan** = 9, **kijun** = 26, **shift** = 26. B: **n** = 52, **shift** = 26.	`close above IchimokuSpanA (9, 26, 26)`	Expecting a future cloud; ATP reads only past candles.

E. Volatility and bands

10 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`ATR`	Average true range: the usual candle size, in price. Indicator	**n** = 14.	`ATR (14) above ATR (14) 5 bars ago`	Comparing ATR of two stocks with very different prices.
`MedianRange`	Median candle size (high minus low) of the n candles before this one: the market's own noise. Indicator	**n** = 20.	`MedianRange (20) below MedianRange (20) 20 bars ago`	Expecting it to include the last candle; it does not.
`ATRPercentile`	0 to 100: where the previous candle's ATR (as a share of the close) sits among the last lookback candles. Indicator Breakouts	**n** = 14, **lookback** = 100.	`ATRPercentile (14, 100) below 20`	It needs n + lookback candles.
`BBUpper`, `BBMid`, `BBLower`	Bollinger bands: an average and k standard deviations above and below. Indicator	**n** = 20, **k** = 2.0.	`close crosses above BBUpper (20, 2)`	Expecting BBMid to change with k (it does not).
`KeltnerUpper`, `KeltnerMid`, `KeltnerLower`	Keltner channel: an EMA and k times the average true range around it. Indicator	**n** = 20, **k** = 2.0.	`BBUpper (20, 2) below KeltnerUpper (20, 1.5)`	Same as Bollinger: k does not move the middle line.
`StDev`	Standard deviation of a value over n candles. Indicator Extra functions	**x**, **n**.	`StDev (close, 20) below StDev (close, 20) 10 bars ago`	Comparing it with a price level.

F. Volume measures

3 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`OBV`	On-balance volume: a running total, added on a higher close, taken off on a lower one. Indicator	None.	`OBV above OBV 10 bars ago`	Comparing OBV values between two stocks; only its direction means something.
`RelVolume`	This candle's volume divided by the average of the n candles before. Indicator Breakouts	**n** = 20 (2 to 200).	`RelVolume (20) at or above 1.5`	Typing 150 for "1.5 times".
`RelVolumeTOD`	Volume against the same time of day in past sessions (intraday). Indicator Breakouts	**sessions** = 20; **mode** = bar / cumulative. Intraday timeframes only.	`RelVolumeTOD (20, bar) above 2`	Using it on Daily (not offered there).

G. Maths and history helpers

16 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`Max, Min`	Highest / lowest value of x over n candles. Indicator	**x**, **n**.	`close above Max (high, 20) 1 bar ago`	Forgetting "1 bar ago": the close can never be above the max that includes its own candle's high.
`PctChange`	% change of x over n candles. Indicator	**x**, **n**.	`PctChange (close, 5) above 3`	Typing 0.03 for 3 % (it is already in %).
`ZScore`	How many standard deviations x is from its n-candle average. Indicator	**x**, **n**.	`ZScore (close, 20) below -2`	Reading it as a percent.
`Lag`	x as it was n candles ago. Indicator	**x**, **n**.	`close above Lag (close, 5)`	Same as "bars ago"; use whichever is clearer to you.
`Abs, Round, Floor, Ceil, Sqrt`	Absolute value, rounding (Round has **digits** = 0), whole number down / up, square root. Indicator	**x**.	`Abs (PctChange (close, 1)) above 2`	Sqrt of a negative value gives no value.
`Greatest, Least`	The largest / smallest of several values. Formula	Two or more values.	`close > Greatest(EMA(close,20), EMA(close,50))`	Mixing units inside it.
`Count`	How many of the last n candles met a condition. Formula	**n**, a condition.	`Count(10, close > open) ⩾ 7`	Putting a last-bar-only function inside (refused).
`CountStreak`	Candles in a row, up to now, where a condition held. Formula	A condition.	`CountStreak(close > EMA(close, 20)) ⩾ 5`	As Count.

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`CrossAbove, CrossBelow`	One value crossed above / below another on this candle. In the Indicator block these are the comparison words "**crosses above**" / "**crosses below**".	Two values of the same unit.	`close crosses above EMA (close, 20)`	Expecting a match on later candles; a cross is one candle.

H. Ranks across your list

3 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`Rank`	Position of a value inside your scanned list; 1 = highest. Rank ("**Rank of**")	The indicator to rank; "**at or below**" / "**at or above**" a number.	`Rank of PctChange (close, 20) at or below 10`	Forgetting it depends on the list: the same stock ranks differently in NIFTY 50 and NIFTY 500.
`PercentileRank`	The same as a percentile, 0 to 100. Rank ("**Percentile rank of**")	As Rank.	`Percentile rank of RSI (14) at or above 90`	Reading 90 as "rank 90".
`RankScore`	0 to 100 score of a stock in a ranking system (a saved one, or a built-in one such as Momentum). Daily only. Formula Rankings	**system** (name).	`RankScore("platform:Momentum") ⩾ 80`	Using it on an intraday chart (refused).

I. Session and intraday levels


9 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`DayOpen`	The session's opening price. Indicator	None.	`close above DayOpen`	Using it on Weekly, where a candle spans many sessions.
`PDH, PDL, PDC`	Previous session's high, low and close. Indicator	None.	`close crosses above PDH`	Expecting the previous candle on an intraday chart; it is the previous **session**.
`ORHigh, ORLow`	High / low of the session's first **minutes**; known only after that range is complete. Indicator	**minutes** (starts at 15).	`close above ORHigh (15)`	Choosing minutes that are not a whole number of the chart's candles.
`VWAP`	The session's volume-weighted average price. Indicator	None.	`close above VWAP`	Using it on Daily and expecting an intraday VWAP line.

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`SessionVWAP`	VWAP from the session open on the exchange calendar (pre-open left out). Intraday only. Indicator Breakouts	None.	`close above SessionVWAP`	As VWAP.
`TimeOfDay`	True when the candle starts between two clock times (exchange time). Intraday only. Filter Extra functions	**start**, **end** as HH:MM.	`TimeOfDay (09:30, 11:00)`	Typing 9:30 instead of 09:30 (refused).

J. Market structure, swings and levels

15 functions

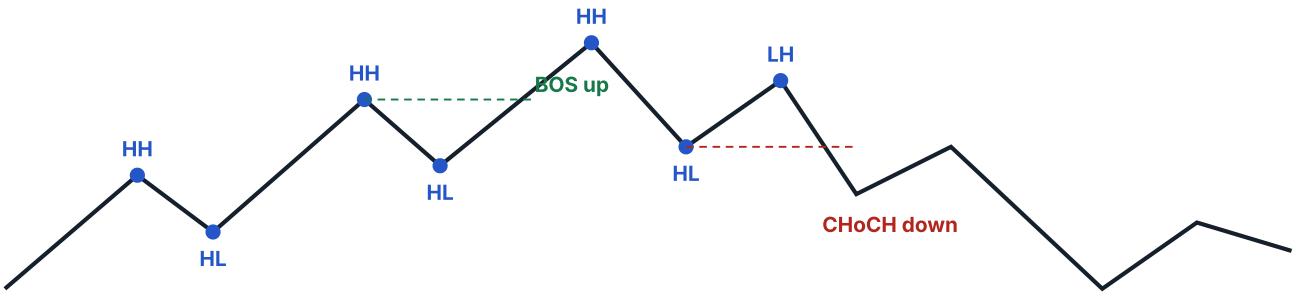

UPTREND: higher highs and higher lows

close below the last higher low

Made-up price path. A swing is confirmed only after price has moved away from it, so the labels appear some candles after the turn.

Two settings appear often here. swing (a window, starts at 3): a candle is a swing high (low) when it is the highest (lowest) of the swing candles on each side. **degree** (0, 1, 2 or 3): the size of the swings, 0 smallest. A larger degree needs more history: about 100, 250, 600 and 1,200 candles.

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`Trend`	Market-structure trend: UPTREND, DOWNTREND or RANGE. Last bar only. Category	**swing** = 3.	`Trend is UPTREND`	Trying to read it on another timeframe or bars ago (it reads the scan's chart, last bar).
`StructureEvent`	The latest structure event: BOS_BULLISH, BOS_BEARISH (break of structure), CHOCH_BULLISH, CHOCH_BEARISH (change of character); empty when none. Category	**swing** = 3.	`StructureEvent is CHOCH_BULLISH`	Expecting it on every stock; many have no event.
`SwingHigh, SwingLow`	The last **confirmed** swing high / low (a price). Indicator	**degree** = 0.	`close above SwingHigh (0)`	Expecting the very latest peak; it shows only once confirmed.
`PriorSwingHigh, PriorSwingLow`	The confirmed swing before the last one (or two / three before). Indicator	**degree** = 0, **back** = one / two / three.	`SwingLow (0) above PriorSwingLow (0, one)`	No value until enough swings are confirmed.
`SwingDirection`	UP after a confirmed swing low, DOWN after a confirmed swing high. Category	**degree** = 0.	`SwingDirection is UP`	Reading it as the trend; it is only the last swing's side.
`SwingLabel`	HH / LH (for highs) or HL / LL (for lows): the last confirmed swing against the one before. An equal high reads LH, an equal low HL. Category Extra functions	**kind** = high / low; **degree** = 0.	`SwingLabel (low, 0) is HL`	Picking kind = high and looking for HL (never matches).

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`DowTrend`	Dow trend from confirmed swings: UP (higher high and higher low), DOWN, RANGE. Category Breakouts	**degree** = 0.	`DowTrend on Weekly is UP`	Short history: it needs 40 / 250 / 600 / 1,200 candles by degree.
`SwingZoneStrength`	0 to 100 strength of the zone at the last confirmed swing low (support) or high (resistance). Indicator	**side** = low / high; **degree** = 0.	`SwingZoneStrength (low, 0) above 60`	Reading the number as a chance of anything; it scores the zone's shape only.
`SwingZoneDistance`	Close minus the middle of that zone, in median candle sizes (positive = above). Indicator	**side**, **degree**.	`SwingZoneDistance (low, 0) below 1`	Reading it as rupees or %.
`NearSupport`, `NearResistance`	The close is within a % of a support / resistance zone edge. Last bar only. Filter	**tolerance_pct** (starts at 0.5), **swing** = 3.	`NearSupport (0.5, 3)`	Typing 50 for 0.5 % (it is already in %).
`ReversalAt`	Price turned at a level on this candle (touch, reclaim, strength, close location). Bullish at support, bearish at resistance. Filter	**level** = PDH / PDL / PDC / DayOpen / close; **direction** = bullish / bearish.	`ReversalAt (PDL, bullish)`	Picking a level far from price; it needs a touch.
`RealBreak`	A real break of a level confirmed within the last n candles: a close beyond it by a buffer, then follow-through, acceptance or a failed retest. A wick or a reclaimed close is a false break. Filter	**level**; **side** = above / below; **n** = 20.	`RealBreak (PDH, above, 20)`	Expecting it on the break candle itself; it needs the confirmation.

A further swing function, SwingZoneEdge, belongs to the wave group (Q).


K. Candle patterns

3 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`Pattern`	A named candle pattern on this candle (uses it and up to two before). Filter	**name**: doji, hammer, shooting_star, bullish_engulfing, bearish_engulfing, morning_star, evening_star, bullish_pin_bar, bearish_pin_bar, inside_bar, bullish_outside_bar, bearish_outside_bar, bullish_rejection, bearish_rejection; with extra functions also bullish_strong_body, bearish_strong_body, bullish_gap_reversal, bearish_gap_reversal. **confirm** = any / confirmed / failed / unconfirmed (extra functions).	`Pattern (hammer, any)`	Picking "confirmed" and expecting the pattern candle itself; "confirmed" is the next candle closing beyond the pattern's far side.
`PatternBullish, PatternBearish`	Any bullish / bearish pattern on the last candle. Last bar only. Filter	**confirm** = any.	`PatternBullish (any)`	Doji and inside bar have no direction, so they never count here.

L. RSI divergence

2 functions

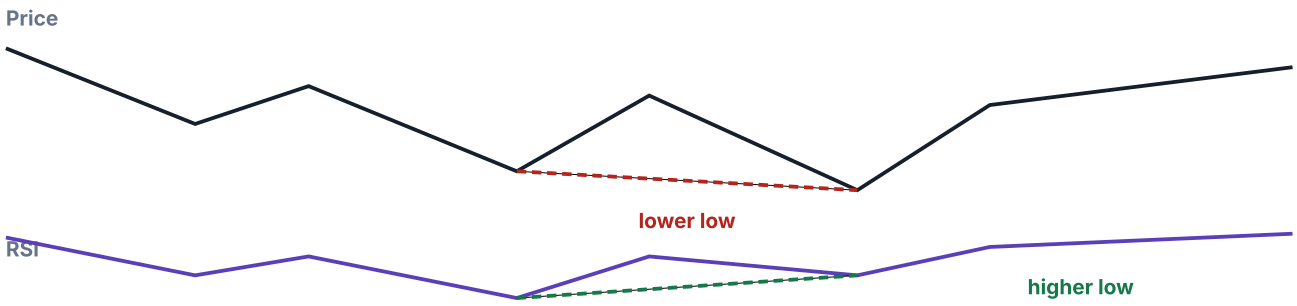

Made-up data. Regular bullish divergence: price makes a lower swing low while RSI makes a higher low.

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`RsiDivergence`	RSI divergence between the last two **confirmed** swing lows (bullish: lower low with higher RSI) or highs (bearish: higher high with lower RSI). Hidden kind: bullish = higher low with lower RSI; bearish = lower high with higher RSI. Filter Extra functions	**side** = bullish / bearish; **lookback** = 15 (the latest swing at most this many candles back); **degree** = 0; **period** = 14; **kind** = regular / hidden.	`RsiDivergence (bullish, 15, 0)`	A too-small lookback: the swing is confirmed only some candles after it, so few stocks pass.
`RsiDivergenceRef`	The prices of the latest divergence: **extreme** (the divergent swing's low / high) or **confirm_bar** (the far side of the candle that confirmed the swing). Indicator Extra functions	**what**, **side**, **degree**, **period**, **kind**.	`close above RsiDivergenceRef (confirm_bar, bullish)`	No value until a first divergence is found.

M. Option chain and futures


4 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`PCR`	Put-call open-interest ratio of the stored option chain. Last bar only. Indicator	None.	`PCR above 1.2`	Running it on a list without options: those stocks have no chain and are not checked.
`ChainBias`	A label from the option chain: BULLISH, BEARISH, NEUTRAL or CONFLICTING. Category	None.	`ChainBias is BULLISH`	Reading the label as advice; it only summarises open-interest numbers.
`MaxPainDistancePct`	Distance between the underlying and the max-pain strike, as % of the underlying. Indicator	None.	`MaxPainDistancePct below 1`	Expecting a sign; it is always positive.
`FuturesOI`	Open interest of the near-month future, from the stored snapshot at or before the candle's close. Indicator	None.	`FuturesOI above 0`	Expecting a value where the snapshot has none (not checked).

Under Conditions, "**More filters: indicator, structure, option chain**" opens the older filter panel with ready choices such as "Trend: Uptrend", "Break of Structure (Bullish)", "Near support zone", "PCR threshold" and "Near Max Pain". It is kept for users who know it; the blocks above do the same work.

N. Breakouts (yes / no and labels)

22 functions

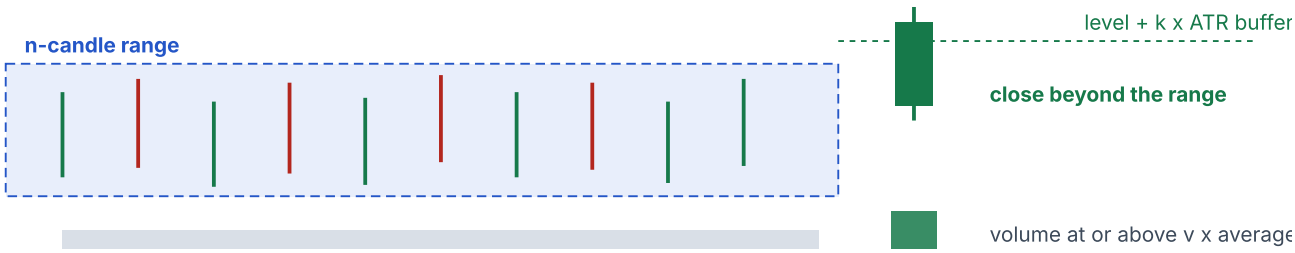

Made-up candles. Most breakout functions share three settings: **side** (up / down), **k** (the ATR buffer the close must clear, starts 0.2) and **v** (volume as a multiple of its average, starts 1.5).

All in this group show only when "Breakout screens" is switched on (VCP, Donchian, squeeze, MA and regime need set 2; trendline, channel, pattern, gap and retest need set 3). Most come ready-made in the library (section 6.2), so a beginner rarely needs to set them by hand.

Name in the app	What it measures	Settings (besides side / k / v)	Example condition	Common beginner mistake
`RangeBreakout`	Close beyond the n-candle range (mode auto: the consolidation before the candle) by k ATR, on volume. Filter	**n** = 20, **mode** = fixed / auto.	`RangeBreakout (up, 20, 0.2, 1.5)`	Setting v very high and getting no matches.
`SwingBreakout`	Close beyond the last confirmed swing high / low by k ATR. Filter	**degree** = 1.	`SwingBreakout (up, 1, 0.2)`	Degree too large for the history.
`SwingBreakType`	On a swing-breakout candle: BOS (with the swing trend), CHOCH (against it) or BREAK. Category	As SwingBreakout.	`SwingBreakType (up, 1, 0.2) is CHOCH`	Empty on candles that are not a breakout.
`NRBreakout`	The candle after an inside / NR4 / NR7 candle closes beyond it. Filter	**setup** = inside / nr4 / nr7.	`NRBreakout (up, nr7)`	Looking on the NR7 candle itself; it is the next one.
`NewHighBreakout`	Close beyond the high / low of the previous N weeks. Daily / Weekly. Filter	**weeks** = 52.	`NewHighBreakout (up, 52)`	Running it on an intraday chart.
`RangeExpansion`	A candle at least k ATR wide, closing in its top / bottom third, on volume. Filter	**k** = 2.0.	`RangeExpansion (up, 2, 1.5)`	Forgetting k here means candle width, not the buffer.
`VolumeBreakout`	Volume at least v times average with a directional candle at / through the n-candle high / low. Filter	**v** = 2.0, **n** = 20.	`VolumeBreakout (up, 2, 20)`	Using it on a list with very thin volume.
`DonchianBreakout`	Close beyond the highest high / lowest low of the previous n candles. Filter	**n** = 20.	`DonchianBreakout (up, 55)`	-

Name in the app	What it measures	Settings (besides side / k / v)	Example condition	Common beginner mistake
`SqueezeBreakout`	Bollinger mode: close outside the band after its width was at a low; TTM mode: bands back outside the Keltner channel. Filter	**mode** = bollinger / ttm, **n** = 20, **lookback** = 125.	`SqueezeBreakout (up, bollinger)`	Needs n + lookback candles.
`MABreakout`	Close above / below a flat or rising (falling) n-candle average by k ATR. Filter	**n** = 50, **type** = sma / ema.	`MABreakout (up, 50, sma)`	-
`RegimeBreakout`	RSI leaves the 50 ± band it held for n candles, ADX rises from at or below a level, close clears the range. Filter	**band** = 10, **n** = 20, **adx** = 20.	`RegimeBreakout (up)`	-
`TrendlineBreakout`	First close beyond a trendline (falling resistance / rising support) or a channel's far edge. Filter	**mode** = line / channel, **touches** = 2.	`TrendlineBreakout (up, line, 2)`	Too many touches: few lines qualify.
`ChannelLine`	The channel's trend-side line at this candle (a price). Indicator	**touches** = 2, **edge_touches** = 0.	`close above ChannelLine (up, 2, 0)`	-
`PatternBreakout`	Close beyond a flag, pennant or converging triangle. Filter	**pattern** = flag / pennant / triangle.	`PatternBreakout (up, flag)`	-
`GapBreakout`	The session opened beyond the previous high / low (or a base) and held for the hold window. Filter	**level** = prev_day / base, **hold** = 30 minutes.	`GapBreakout (up, prev_day, 30)`	Timeframes: 1, 3, 5, 15 min and Daily only.
`GapType`	At the end of the hold window: GAP_AND_GO, GAP_HOLD or GAP_FILL. Category	As GapBreakout.	`GapType (up) is GAP_AND_GO`	-
`VCPBreakout`, `VCPReady`	Daily volatility-contraction base: the first close above its pivot (Breakout), or every candle the base is ready within pct % under the pivot (Ready). Formula (or the library screen)	**contractions** = 2, **ratio** = 1.0, **template**, **dryup** (yes / no); Ready: **pct** = 5.	Library: "Daily volatility-contraction (VCP-style) breakout"	Daily only; needs about a year of candles.
`ORBreakout`	First close beyond the opening range of the first **minutes**, with time-of-day volume and VWAP side; once per side a session. Formula (or the library screen)	**minutes** = 15, **vwap**, **skip** = 15.	Library: "Intraday ORB: 15-minute opening range on 5m"	1 to 15 min only.

Name in the app	What it measures	Settings (besides side / k / v)	Example condition	Common beginner mistake
`DayLevelBreak`	First close beyond the first hour's, previous session's or first candle's high / low. Formula	**level** = first_hour ...	Library: "Intraday first-hour high / low break on 15m"	1 to 15 min only.
`DayExtremeBreak`	A close beyond the session's high / low so far, with volume and VWAP agreement. Formula	As above.	Library: "Intraday new high / low of day on 5m"	1 to 15 min only.
`RetestEntry`	After a range / swing / Donchian / trendline / channel breakout, price came back within **bars** candles and held the level (a reversal or a touch). Formula (or the library screen)	**of**, **bars** = 10, **reversal** = yes.	Library: "Daily range-breakout retest"	Once per breakout only.

O. Breakout levels (prices of a breakout)

11 functions

Names in the app	What they measure	Settings	Example condition	Common beginner mistake
`RangeBreakoutRef`, `SwingBreakoutRef`, `NRBreakoutRef`, `VolumeBreakoutRef`, `DonchianBreakoutRef`, `MABreakoutRef`, `LineBreakoutRef`, `PatternBreakoutRef`, `GapBreakoutRef`, `VCPBreakoutRef`, `RetestEntryRef`	The prices of the same breakout as the matching function with the same settings: **level** (the broken level), **base_high**, **base_low**, and other reference levels. Indicator (VCP and Retest: Formula)	**what** (which price), then the same settings as the breakout.	`close above RangeBreakoutRef (level, up, 20)`	Using different settings than the breakout it belongs to: it then describes another breakout.

P. Market zones

4 functions

Name in the app	What it measures	Settings	Example condition	Common beginner mistake
`NearZone`	A live zone of that role (demand below, supply above) within a % of the close, from the stored nightly zones. Formula Zones	**role** = any / demand / supply; **tolerance_pct** = 0.5; **family** = all / zones / levels.	`NearZone("demand", 0.5)`	Expecting zones the nightly job has not built yet.
`ZoneRole`	DEMAND or SUPPLY for that nearest zone. Formula	**tolerance_pct**, **family**.	`ZoneRole(0.5) == "DEMAND"`	-
`ZoneState`	FRESH, TESTED or FLIPPED. Formula	**role**, **tolerance_pct**, **family**.	`ZoneState("demand") == "FRESH"`	-
`ZoneStrength`	0 to 100 strength of that zone. Formula	As ZoneState.	`ZoneStrength("demand") ⩾ 60`	-

Q. Wave count

16 functions

Shown only with "Wave count in screens" switched on; that part is marked unfinished. All read confirmed swings of **degree** 1, 2 or 3 (default 1).

Names in the app	What they measure	Settings	Example condition	Common beginner mistake
`WaveState, WaveType, WaveAlt, WaveClarity`	The running wave (IMP_1 to IMP_5, COR_A to COR_E, UNCLEAR); the count's type (IMPULSE, ZIGZAG, FLAT ...); the alternate reading; how clear the count is (CLEAR, ALT_AGREES ...). Category	**degree**.	`WaveState (1) is COR_A`	Reading a count as certain; the alternate exists for that reason.
`WaveOrigin, WaveEnd, WaveInvalidation, WaveCap`	Prices of the count: its start, the end of a finished wave, its hard-rule invalidation level, and a cap level (evidence only). Indicator	**degree**; WaveEnd also **wave**.	`close above WaveInvalidation (1)`	No value before the count exists.
`WaveRetrace, WaveProjection, WaveRatio`	A ratio back from the previous wave's end; a projection from the running wave's start; the running wave's length against a base wave. Indicator	**degree**, **ratio** (0 to 10), **base_wave**.	`WaveRatio (1) below 0.618`	-
`WaveLineLevel, WaveLineBreak, SwingZoneEdge`	A line through the count's own pivots at this candle; its first close beyond by k ATR; the far side of the area around the last swing zone. Indicator / Filter	**degree**, **line**, **side**; SwingZoneEdge **width**.	`WaveLineBreak (1, zero_two, up)`	-
`WaveBeyondOrigin, WaveVolumeLower`	A counter wave went beyond the count's start; a wave's mean volume is lower than its base wave's. Filter	**degree**; **wave**, **base_wave**.	`WaveVolumeLower (1, ...)`	-

R. Company data, ownership and events

14 functions

Formula only (under "Advanced"). Most need extra switches and data that are marked unfinished; your app may not offer them yet. Figures are "point in time": only what was published by the candle's close.

Names in the app	What they measure	Settings	Example condition	Common beginner mistake
`Sector, Industry, McapBucket, IndexMember, IsFnO`	NSE sector and industry; large / mid / small cap; member of an index; in the F&O segment - all as of the run date. Formula	IndexMember: **index**.	`IsFnO() AND Sector() == "IT"`	Using these when a list (section 4) already does the same job more simply.

Names in the app	What they measure	Settings	Example condition	Common beginner mistake
`EPSGrowthYoY`, `SalesGrowthYoY`, `EarningsYield`, `ReturnOnCapital`, `GrahamNumber`, `NCAVPerShare`	Quarter-on-same-quarter EPS and sales growth %; EBIT over enterprise value %; return on capital %; Graham number; net current asset value per share. Formula Company figures	None.	`close < GrahamNumber()`	Expecting the latest restated figure; ATP uses only what was known then.
`Holding`, `HoldingChange`, `DaysToEvent`	A holder's stake % (promoter, pledge, FII, DII, public); its change over quarters; calendar days to the next known event (results, board meeting, AGM, buyback, dividend, ex-date). Formula Ownership	**holder**, **quarters** = 1; **kind**.	`DaysToEvent("results") > 5`	-

11. Three example scans, step by step

Each example uses only functions that exist in ATP. The numbers are examples of settings, not recommendations. Change them to your own.

Example 1 - A ready template: "Momentum" on NIFTY 50, Daily

1. Open Find setups. The "**Your list**" card shows "**NIFTY 50 stocks (50)**" and "**Chart**" shows "**Daily**". If not, set them (sections 4 and 5).
2. In "**Start a scan**", tap the tab "**Template**".
3. Tap "**Momentum**".
   You see: "**Conditions (2)**" opens with `RSI (14) above 60` and `close above EMA (close, 20)`.
4. Press "**Run**".
   You see: "**Matched N of 50**"; the count beside each condition shows how many stayed in after it.
5. Press "**Show on chart**" on a match. Read "**Why it matched**": the RSI value and the close vs the average at the matched candle.

Check: you should now see two conditions, a "**Matched N of 50**" header and, for a match, its chart window.

Example 2 - Build your own: uptrend, near support, a bullish candle

1. Pick a list, for example "**F&O stocks**", and the chart "**Daily**".
2. Tab "**Template**" → "**Blank: I add conditions**".
3. Beside "**Add a condition**", pick "**Category**", then press "**Add a condition**". Tap the function and choose **Trend**; keep "**is**"; tick **UPTREND**.
   You see: `Trend (3) is UPTREND`
4. Pick "**Filter**", press "**Add a condition**", choose **NearSupport**, set tolerance to `1`.
   You see: `NearSupport (1, 3)`
5. Pick "**Filter**" again, add, choose **PatternBullish** with **any**.
   You see: `PatternBullish (any)`
6. Type a name in the name box, for example `Uptrend at support`, press "**Save**", then "**Run**".
7. If one stage leaves nothing, the note "*This condition removes every symbol...*" appears. Press "**Show the stage**", then raise the tolerance or switch the block off for a moment to see which part removes the stocks.

Check: you should now see "**Conditions (3)**" under "**All of these must pass**", a saved name, and the results header.

Example 3 - Structure with RSI divergence, and an alert

Needs "Extra screen functions" switched on (for RsiDivergence). If RsiDivergence is not in the Filter list, your app does not offer it yet.

1. Pick a list (for example a sector) and the chart "**Daily**". Start blank.

2. Add a "Filter": **RsiDivergence** with side **bullish**, lookback `15`, degree `0`.
   You see: `RsiDivergence (bullish, 15, 0)`

3. Add a "Group". Keep "Any of these". The group starts with two example blocks: remove them with the bin icon. Inside the group, pick "Category" as the kind of block to add and add two: `StructureEvent is CHOCH_BULLISH` and `SwingLabel (low, 0) is HL`.
   You see: the group passes when either of the two is true.

4. Add an "Indicator": `volume above SMA (volume, 20)` (pick **volume** on the left, then "Compare with" → "Another indicator" → **SMA** with x = volume).

5. Press "Save", then "Run". Open a match with "Show on chart" and tick "Show failed conditions": in the group, the branch that was not needed is marked so.

6. Press "Tell me when it matches", keep "When the bar closes", press "Turn on the alert".

Check: you should now see three top-level conditions (one of them a group of two), the results, and under "Alerts on this scan" a line like *"On · checks each time a daily bar closes · N symbols"*.

12. Messages, problems and what to do

12.1 Why a stock "could not be read"

Message	Button	What it means
Your broker login has ended. Log in again to read the bars.	"Log in"	Your daily broker login expired. The button opens the broker panel in place.
Daily history for SYMBOL is not stored yet.	"Log in"	No broker, and ATP's end-of-day store lacks this stock.
Connect your broker for intraday bars.	"Log in"	An intraday chart without your own broker.
The broker's request limit was reached. Run again in a minute.	"Retry"	Too many requests at once. Wait a minute.
N stocks waited for your broker's limit. Run again in a minute to include them.	-	Part of a long list waited; run again.
The broker did not send the bars. / The broker could not be reached.	"Retry"	A problem at the broker or the connection.
The broker does not send bars for this timeframe.	"Try another timeframe"	Pick another chart.
No closed bars came back for this timeframe.	"Try another timeframe"	For example a new listing, or a candle not closed yet.
The screen has no value on the last bar (too little history for its indicators).	"Try another timeframe"	A window or degree needs more candles than the stock has. Use a smaller window or a larger timeframe.
not enough history on (timeframe)	"Try another timeframe"	The same, for a side read on another timeframe.
Could not read any of the N stocks. (reason)	one of the above	Not one stock could be read; the reason tells you which button to use.

12.2 When the scan itself is refused

Message (parts)	What to change
compares price with index	Units do not match (for example close against RSI). Compare like with like.
... the window must be a whole number from 1 to 500	Fix the window setting.
... must be one of ...	Pick one of the listed choices.
... must be between ... and ...	The number is outside its allowed range (shown in the message).
... must be a time as HH:MM (00:00 to 23:59)	Type times like 09:30.
... is known for the last bar only, so ... cannot read its earlier values	A last-bar-only function was put inside one that reads history (for example inside an average). Use it on its own.
... takes no [offset] or @timeframe	Remove bars ago / the other timeframe from that function.
... is one of ...; '...' never matches	A category value that does not exist.
Pick at least one value for (name).	Tick a value in the Category block.
Type the (setting) for (name).	A text setting is empty.

12.3 Common questions

Question	Answer
Find setups is missing, or shows "Coming soon".	The screener is not switched on for your organisation. Ask your administrator.
"Matched 0 of 50". Is something broken?	No. No stock met all conditions on the last closed candle. Look at the count beside each condition to see which one removes the most, switch it off or loosen it, and run again.
Results differ from what I see on a live chart.	The scan uses closed candles; a live chart also shows the forming one. Settings (for example SMA vs EMA) may also differ.
The time pill turned amber.	The results are older than two candles of your timeframe. Press "**Run**" again for newer candles.
My 200-stock list ran in parts. Why?	Today one request takes up to 50 stocks, and the page paces the parts inside your broker's limits (section 4).
I have no broker. What can I scan?	Daily, Weekly and Monthly, on ATP's stored end-of-day data. Intraday needs your own broker.
A function in this guide is not in my list.	It needs an extra switch, or it is a Formula-only function (section 10 marks both).
Does a match mean I can take a trade?	No. A match only says the conditions you chose were true on the data shown. It is information for your own study, not advice.
Can the scan place an order?	No. Scans and alerts never place, change or cancel an order.

13. Glossary

Word	Meaning in ATP's screener
Scan / screen	A set of conditions run on a list. Both words are used.
List (universe)	The stocks a scan reads.
Timeframe (chart)	The size of one candle: 1 min to Monthly.
Candle / bar	One period's open, high, low, close and volume. The app uses both words.
Closed candle	A finished candle; it never changes. Scans use only these.
Forming candle	The current candle, still changing. Only an alert can be set to read it.
Block / stage / condition	One line of the scan. A stage is a top-level block.
Funnel	The drawing of the conditions: each stage narrows the list.
Match	A stock for which every switched-on condition was true on the last closed candle.
Bars ago	Read a value that many candles back (1 to 500).
Window (n)	How many candles a function looks at.
Swing high / low	A turning point; confirmed only after price has moved away from it.
Degree	The size of swings, 0 (smallest) to 3.
HH, HL, LH, LL	Higher high, higher low, lower high, lower low: a swing compared with the one before.
BOS	Break of structure: a close beyond a swing in the direction of the trend.
CHoCH	Change of character: a break against the trend.
ATR	Average true range: the usual size of a candle in price.
Median range	The middle candle size of recent candles: the market's own noise.
Divergence	Price and RSI make swings in opposite directions.
PCR	Put-call ratio of open interest in the option chain.
Max pain	The strike at which the total value of all open options would be lowest at expiry.
Open interest (OI)	Derivative contracts still open.
EOD	End of day: data from the exchange's daily files.
Evidence chart	The chart that opens with Show on chart, drawing only the scan's own conditions.
PAPER	Practice trading with no real money.

Remember

The screener shows conditions on data. It does not tell anyone what to do. Every match is information for your own study and decision.

14. For the administrator

This appendix maps each part of the guide to the switch (flag) that shows it. The user-facing text above uses plain names only.

Part of the guide	Flag	Note
Find setups page at all	`screener_v2`	Off: the page leaves the menu / shows Coming soon.
Redesigned layout (cards, Start a scan, list picker)	`ui_v2`	Off: the older "Universe" column layout.
Screen library, ready scans	`screener_gallery`	The taxonomy API.
Breakout screens set 1 / 2 / 3; group N, O, parts of E, F, I, J	`screener_breakouts`, `screener_breakouts_bk3`, `screener_breakouts_bk4`	bk3 / bk4 need screener_breakouts.
Legends cards	`screener_legends`, `screener_legends_lg2`, `screener_legends_lg3`	lg3 needs screener_fundamentals.
Opening Legends / breakout screens in the builder; Formula block	`screener_builder_u2`	Formula also needs the user's Advanced toggle.
Extra screen functions (StDev, RsiDivergence, RsiDivergenceRef, SwingLabel, TimeOfDay, v2 candles, Pattern confirm)	`screenql_amw_functions`	
Market zones (group P)	`market_zones`	Needs the nightly zone job.
Wave count (group Q)	`screener_waves`	Status: unfinished.
Company figures / ownership (group R)	`screener_fundamentals`, `screener_ownership`	Status: unfinished; need data.
RankScore and the Rankings panel	`screener_rankings`	
Own words, Tell me when it matches, Versions	`screener_copilot` (+ `ui_v2`, `ai_copilot`)	Own words needs an AI provider.
While the bar is forming (alerts)	`screener_intrabar`	Not offered on Weekly / Monthly.
Show on chart; Trend strip and Replay	`evidence_charts`; `evidence_context`	
Heatmap / Chart grid views	`screener_board_views`	
Run several screens together	`screener_tx2`	Under Advanced.
Past runs; Look back; backtest	(menu); `screener_history`; `screener_backtest`	Past runs shows when More tools exists.
ETFs; Pine Script	`screener_etf`; `strategy_lab_pine`	Pine: status unfinished.
My watchlists; Save matches	`watchlists`	
Today's setups card	`growth_v2` + `ui_v2`	Status: unfinished.
Stored EOD scans without a broker	`backtest_stored_history`	Daily / Weekly / Monthly, NSE.

Part of the guide	Flag	Note
Store-first scans	`market_store_reads`	Behind the scenes.
Data badge "EOD · date"; own-broker-only data	`byob_data_tier`	Status: decision.
Alert "Then" step; Auto PAPER	`scan_then` ; `scan_auto_paper`	Need execution_core; PAPER only.

Numbers used in this guide (code constants)

Per-request cap 50 (screener run route); largest list 500; part size 5 to 50 from the broker's per-second share (fallback 10); bars ago 1 to 500; windows 1 to 500; swing degree history 100 / 250 / 600 / 1,200 candles; alert symbols 50; library file 48 screens; catalogue 163 functions + 6 fields = 169.

What the code does not settle (open)

- Which of the flags above are ON in production is not known from the code; this guide does not assume it.
- Which index-stock lists appear depends on the membership data stored on the server.
- On Find setups the no-broker label is the hover text and the "EOD · date" badge (when `byob_data_tier` is on); the exact words "Last close <date>" were found on other pages, not on the screener.
- M90 (no fixed 50 per request) is on a branch, not merged, when this guide was written.